

6.4 MOTORES SUMERGIBLES DE 12" DE 2 POLOS (3500 1/min)



DIMENSIONES

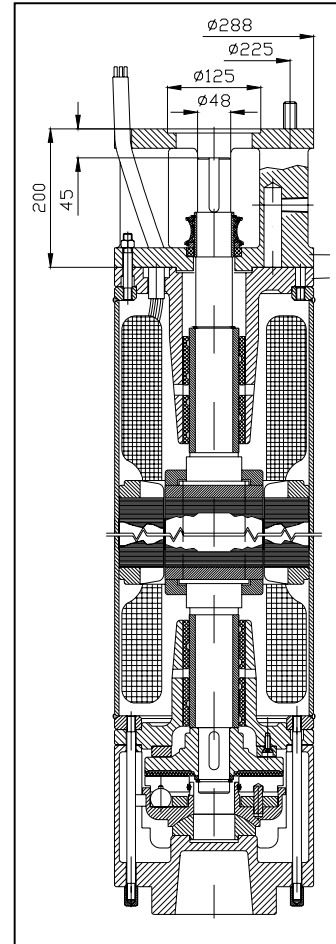


TABLA TÉCNICA

MODELO	POTENCIA [HP]	VEL. [RPM]	DIAM. EXTERIOR		LARGO [MM]	PESO [KGS]	AMPERAJE		FACTOR COS φ		EFICIENCIA [%]	
			[MM]	[PULG.]			220 V. [AMP.]	440 V. [AMP.]	75 %	100 %	75 %	100 %
SUM 12-200	200	3500	285	11.25	1705	446	-	275	0.81	0.84	83	87
SUM 12-250	250	3500	285	11.25	1815	491	-	340	0.82	0.85	83	87
SUM 12-300	300	3500	285	11.25	1985	555	-	400	0.83	0.85	83	87
SUM 12-350	350	3500	285	11.25	2085	598	-	470	0.83	0.86	84	88
SUM 12-400	400	3500	285	11.25	2235	656	-	520	0.84	0.86	84	88

6.5 MOTORES SUMERGIBLES DE 12" DE 4 POLOS (1750 1/min)



DIMENSIONES

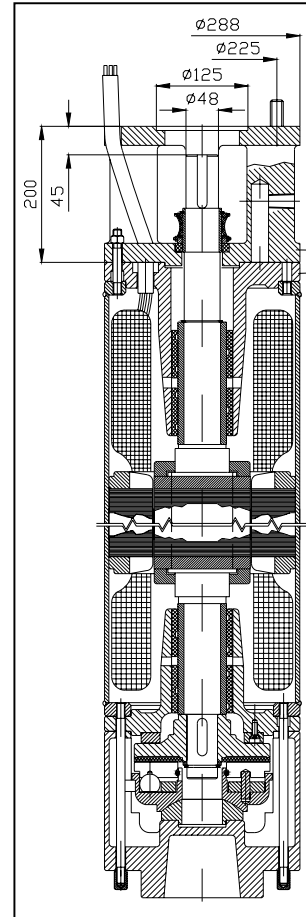


TABLA TÉCNICA

MODELO	POTENCIA [HP]	VEL. [RPM]	DIAM. EXTERIOR		LARGO [MM]	PESO [KGS]	AMPERAJE		FACTOR COS φ		EFICIENCIA [%]	
			[MM]	[PULG.]			220 V. [AMP.]	440 V. [AMP.]	75 %	100 %	75 %	100 %
SUM 12-115-4	115	1755	285	11.25	1749	465	-	150	0.82	0.86	86	87
SUM 12-150-4	150	1755	285	11.25	1849	505	-	194	0.82	0.86	87	88
SUM 12-170-4	170	1750	285	11.25	1979	555	-	215	0.85	0.88	88	88
SUM 12-190-4	190	1755	285	11.25	2049	585	-	246	0.83	0.86	88	88
SUM 12-230-4	230	1755	285	11.25	2249	665	-	297	0.82	0.86	88	88
SUM 12-250-4	250	1755	285	11.25	2399	730	-	323	0.82	0.85	89	89